



Tri-folding Wireless Keyboard with backlit

IC-BK05


User Manual

Thank you very much for purchasing this keyboard, please read this user manual carefully before use.

Package Contents

- 1 x Wireless Keyboard
- 1 x Micro USB Cable
- 1 x Carry Pouch
- 1 x User Manual
- 1 x Warranty Card

Indicator Lights Description

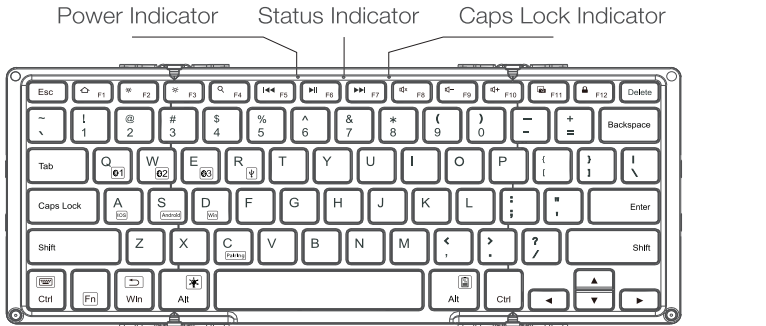

① Power Indicator:

- 1) Unfold the keyboard: it will light in green color for several seconds and then turns off.
- 2) Low battery capacity: When the keyboard is in low battery capacity, it will flash in red color to remind you to charge it.
- 3) Charging: stay in red Color.
Fully Charged: automatically turns off.
- 4) Battery capacity display: Press "Fn + []" keys, it flashes in green color. Every flash represents 25% battery power (4 times flashes in total)

② Status Indicator:

Press "Fn +Pairing" keys to pair the keyboard with your Bluetooth-enabled devices.
Pairing: quick flash in blue color
Successfully Paired: automatically turns off

③ Caps Lock Indicator:

Press "Caps Lock" key to switch between uppercase and lowercase.
Caps lock on: all of the letters you type will appear in uppercase, the indicator will flash in green color.
Caps lock off: all of the letters you type will appear in lowercase, the light will be off.

(For Android users, the Caps Lock indicator may not be on, but Caps Lock function still work)


Specifications

Bluetooth Version	Bluetooth 5.1
Operating Range	Up to 10m
Modulation System	GFSK
Lithium Battery Capacity	750mAh
Uninterrupted Working Time with backlit	>5h
Uninterrupted Working Time without backlit	300h
Stand-by Time	90 days
Charging Time	< 4h
Lithium Battery Life	3 years
Key Life	3 million clicks
Unfolding Dimensions	291 x 117 x 8.25 mm
Folding Dimensions	166 x 120 x 14.8 mm
Front side of keyboard	ABS
Back side of keyboard	Aluminium alloy

Features

- 1.The keyboard is foldable, and it is more easier to carry and use anywhere.
- 2.The keyboard get backlit function and it is cool to use in dark environment.
- 3.Two ways to connect: Wireless Bluetooth and USB wired connection.
- 4.The keyboard is able to connect 4 devices in total (one is for USB wired connection and others are for wireless Bluetooth connection).

5. With two foot stands on both side to keep it balance and stable when typing.To open the two side balance stand, please do as below:

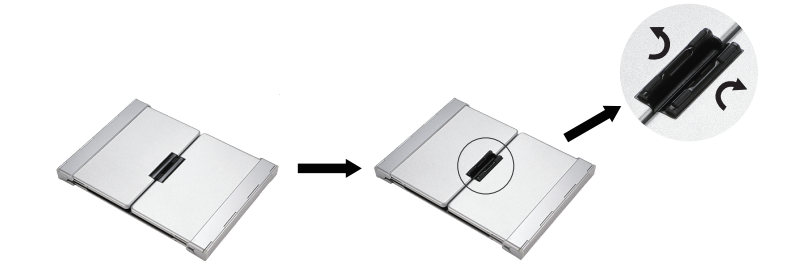


Backlit Function

Press "Fn + []" key to turn on/off backlit function
Press for the first time to turn on the backlit function
Press for the second time to increase the brightness
Press for the third time to turn off the backlit function
Press "Fn + []+[]" or "Fn + []+[]" keys to change backlit colors.

Operation Instruction

Connection with Your Devices

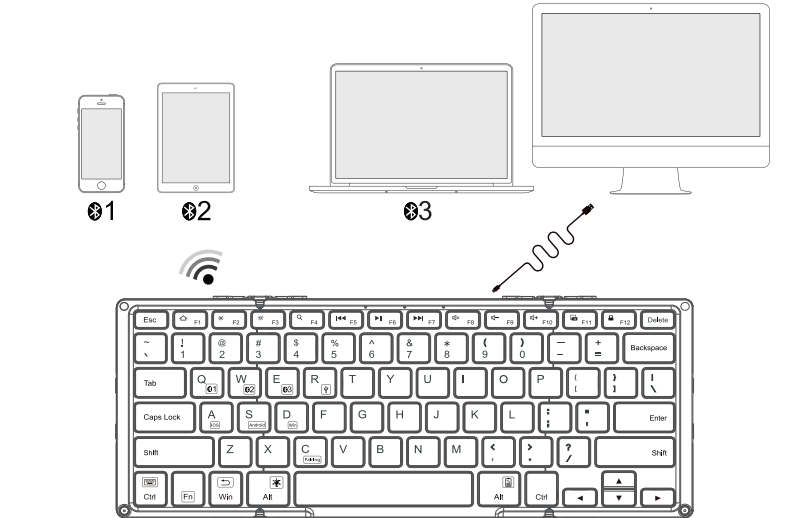

Pairing Guide

a. USB Wired Connection

How to pair with USB wired devices connection?

- Step 1. Unfold the keyboard to power it on; power indicator will be green for 3s, then off.
- Step 2. Plug the provided Micro USB cable to connect your PC/laptop with IC-BK05 keyboard.
- Step 3. Press "Fn" + "R" keys simultaneously to enter wired connection mode.
- Step 4. The status indicator will be green after successfully paired.

b. Wireless Connection

How to pair with wireless devices?

Pairing with the 1st device

- Step 1. Unfold the keyboard to power it on; power indicator will be green for 3s, then off.
- Step 2. Press "Fn"+"Q" keys to enter channel 1.
- Step 3. Press "Fn"+"C" keys simultaneously to enter pairing mode; status indicator will flash blue, starting to search the available bluetooth device.
- Step 4. Find the Bluetooth name "iClever IC-BK05 Keyboard" and click to connect it.
- Step 5. The status indicator will be off after successfully paired.

Pairing with the 2nd device

- Step 1. Press "Fn"+"W" keys simultaneously to enter channel 2.
- Step 2. Press "Fn"+"C" keys simultaneously to enter pairing mode; status indicator will flash blue, starting to search the available bluetooth device.
- Step 3. Find the Bluetooth name "iClever IC-BK05 Keyboard" and click to connect it.
- Step 4. The status indicator will be off after successfully paired.

Pairing with the 3rd device

- Step 1. Press "Fn"+"E" keys simultaneously to enter channel 3.
- Step 2.Press "Fn"+"C" keys simultaneously to enter pairing mode; status indicator will flash blue, starting to search the available bluetooth device.
- Step 3. Find the Bluetooth name "iClever IC-BK05 Keyboard" and click to connect it.
- Step 4. The status indicator will be off after successfully paired.

c. How to switch among 4 devices that are already connected?

Press "Fn" and "Q"/ "W"/ "E" keys to switch among connected Bluetooth devices, and press "Fn"+ "R" key to switch to USB wired connected device.

d. How to re-pair a channel that is already connected?

- If you already connected channel 1 (or channel 2 or 3) with device 1, and you want to use another device to connect channel 1 (or channel 2 or 3), please do as following :
- Step 1. Press "Fn"+"Q" keys simultaneously to enter channel 1.
 - Step 2. Press "Fn"+"C" keys simultaneously to enter pairing mode; status indicator will flash blue, starting to search the available bluetooth device.
 - Step 3. Find the Bluetooth name "iClever IC-BK05 Keyboard" and click to connect it.
 - Step 4. The status indicator will be off after successfully paired.

Notes.

- 1.Auto re-connect function. when you turn on the keyboard, it will connect with the last-used device automatically.
- 2.If connection fails, delete all the pairing records from your device, and follow the above instructions again.

Keys and Function

For iOS and Android devices, press desired shortcut keys (F1-F12) directly to use the shortcut function.

For windows devices, press "Fn" + desired shortcut keys (F1-F12) to use the shortcut functions

Key icon	iOS [Press (F1-F12) key directly]	Android [Press (F1-F12) key directly]	Windows [Press (F1-F12) key directly]	Windows [Press Fn + (F1-F12) keys]
	N/A	Back	Esc	N/A
	Home	Home	F1	Web browser or N/A
	Brightness down	Brightness down	F2	Brightness down (windows 8 and above)
	Brightness up	Brightness up	F3	Brightness up (windows 8 and above)
	Search for	Search for	F4	Search for
	Previous track	Previous track	F5	Previous track
	Play/pause	Play/pause	F6	Play/pause
	Next track	Next track	F7	Next track
	Mute	Mute	F8	Mute
	Volume -	Volume -	F9	Volume -
	Volume +	Volume +	F10	Volume +
	Screen shot	Screen shot	F11	Screen shot
	Lock screen	Lock screen	F12	Lock screen
	Keyboard Display	N/A	N/A	N/A
	N/A	Back	N/A	N/A

NOTE: After connecting with the device, your must press Fn + A/S/D key (A for iOS, S for Android, D for Windows) to select an operating system, otherwise some function are invalid.

Switching the keyboard's language

- | | |
|--------------------------------|------------------------------|
| iOS 8 or below: Win + Space | iOS 9 or above: Ctrl + Space |
| Samsung Android: Shift + Space | Google Android: Ctrl + Space |
| Windows: Win + Space | |

IMPORTANT

As this is a multilingual keyboard, set the language of the device to your desired language before use.

1. For iOS devices only:

Settings > General > Keyboard > Keyboards > Add new keyboard > Select desired language

2. For Samsung Android devices only:

Settings > Controls > Language and input > Samsung Keyboard > Select input languages > Select desired language

3. For Android devices only:

Settings > Language & input > Physical Keyboard > Set up keyboard layouts > Select desired language

4. For Windows devices only:

Control Panel > Clock, Language and Region > Select desired language

System requirements

- iOS 6.0 and above
- Mac OS X v10.6 to Mac OS X v10.12 and above
- Windows XP / Vista / 7 / 8 / 10 , PC computer with a Bluetooth host
- Android 3.0 and above with Bluetooth HID profile (Smartphones and Tablets)

This keyboard is not compatible with Samsung Smart TV (UE37ES5500,UE55KU6400U,UE48JU6400),Mac mini and Nokia phones.

Power Saving Mode

The keyboard will enter sleep mode after being idle for 30 minutes. To activate it, press any key and wait for 3 seconds.

How to Charge it

1. Use the included USB cable for charging. Connect one end to a USB charger, and the other to the keyboard. (USB charger is not included)
2. In charging, the power indicator will turn red. Generally, it takes approximately 4 hours for a full charge. (Output: DC 5V/500mA)

FAQ

My keyboard fails to connect.

If you can't successfully connect the keyboard to your device, please try as following:

- ① Ensure your bluetooth function is on
- ② Delete all the connection records
- ③ Turn off the bluetooth on your devices and turn it on; then re-connect it again.
- ④ Minimize the distance between the IC-BK05 keyboard and your device as close as possible.
- ⑤ Fully charge both devices to ensure the pairing process won't be affected by low batteries.
- ⑥ Restart the keyboard and your devices.

Note: if you connect IC-BK05 by bluetooth adapter, some adapters may be unable to connect because of compatibility problem.

Why do some function keys not work?

Before using the function keys, please read above "Keys and Function" chart first. Additionally, please ensure you have already switched to the corresponding system by pressing "Fn" + "A"/ "S"/ "D" keys for IOS/ Android/Win system.

Why the keyboard is not stable when typing?

In the folding status, the two balance stand are in the front side of middle center. Before typing, please open the two balance stands.

Why sometimes keyboard delays when typing?

Low battery may cause delay, please charge it then try it again. In addition, if you run too many application meantime, it may delay as well, hence please do not run too many application at the same time.

Why input is different to output?

Please ensure your input method is English(US), and you have already pressed "Fn"+A/S/D switch to relative system.

Safety Instructions

- 1.Keep the keyboard away from sharp objects that could damage it.
- 2.Do not put heavy objects on the keyboard.
- 3.To clean the keyboard, gently wipe it by using a moist cotton cloth.
- 4.Please do not spill coffee, tea or other liquids on the keyboard.

FCC Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.